



# ShenZhen Suntech Company Limited

## Product Specification

Product name: ST-TTL-3PIN-RGBW-96-4040-24V  
UCS8904B Addressable RGBW LED Strip

### 1. Product Picture:




### 2. Product Description

- (1) Personalized customization: Print your logo on the PCB, and do customized packages are acceptable.
- (2) Multi-selectivity: The color and width of PCB board could be selected. PCB thickness can be 2oz, 3oz. From IP20 to IP68 styles are all available, Suit for both indoor lighting and outdoor projects.
- (3) Easy installation: Self-adhesive 3M tape on back, it can be fixed on any dry and flat surface without any screws and clips
- (4) Widely Application: It is widely used in wall corridor, indoor environment decoration, entertainment places, wine cabinet bar backlight, ceiling backlight, LED light box light source, LED luminous brand, aquarium supplies, car decoration and so on.
- (5) High quality: Long lifespan 50000 hours, 3 years warranty and 5 years warranty for options.
- (6) Grayscale: 16bit

### 3. Product Dimension:

**UCS8904B D24V 96leds 4040RGBW 10mm width:**

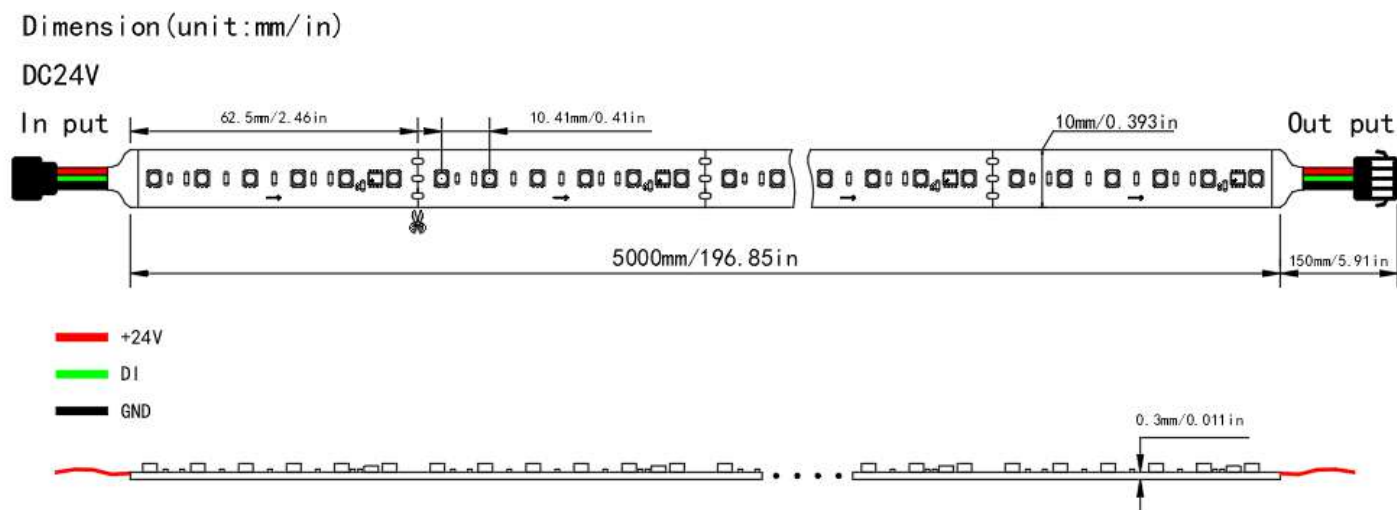

#### 4. Product Specifications:

Item No	Voltage	Power Consumption	PCB Size	IP Rated	LED Qty	Color	Control Way	Pixel per meter
ST-TTL-3PIN- RGBW-96-4040-24V	DC24V	20W/M	5000*10*0.3mm	IP20/IP65/IP67	96leds/m	RGBW	TTL/SPI	16 Pixels

## 5. Production Application


It is widely used in wall corridor, indoor environment decoration, entertainment places, wine cabinet bar backlight, ceiling backlight, LED light box light source, LED luminous brand, aquarium supplies, car decoration and so on.





Recommended controller: T-790K


Recommended controller: T-790K

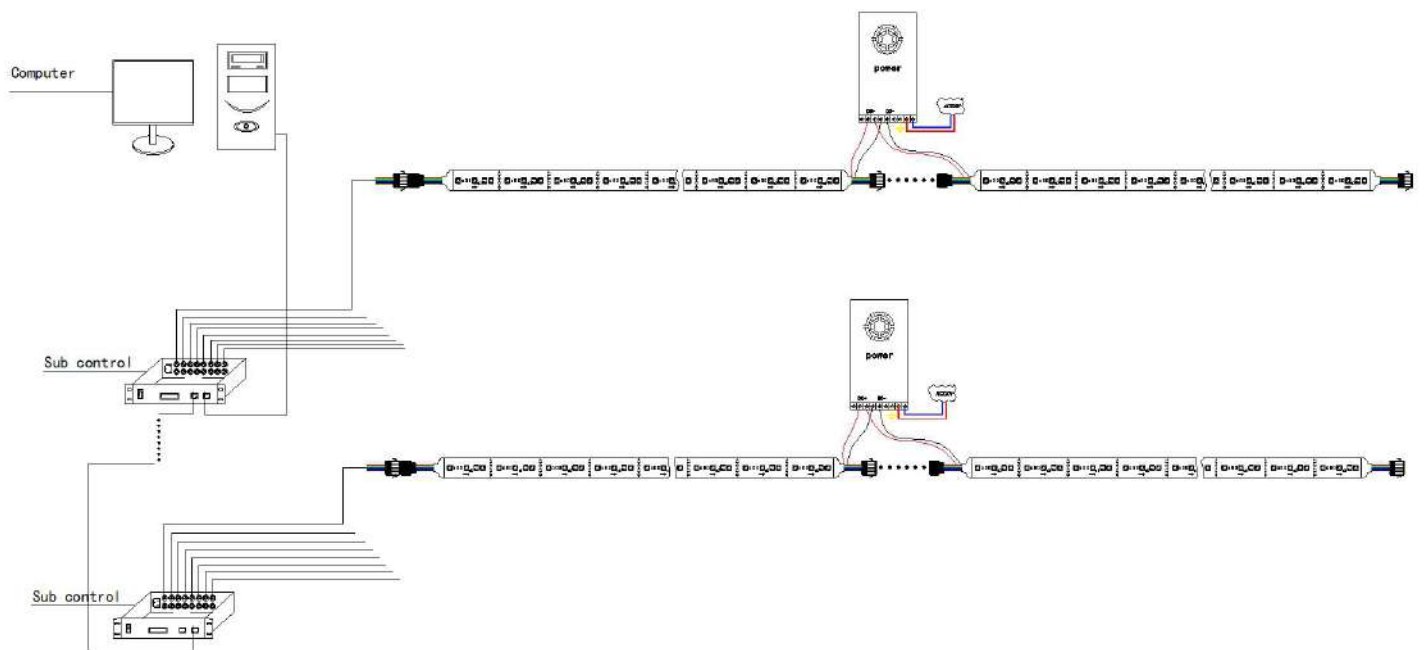

Recommended controller: Main controller: XB-Z2/MR-BF12B,  
Sub controller : T-780K/MR-218DW


Recommended controller: Main controller: XB-Z2/MR-BF12B,  
Sub controller : T-780K/MR-218DW

Sub controller :T-780K/MR-218DW

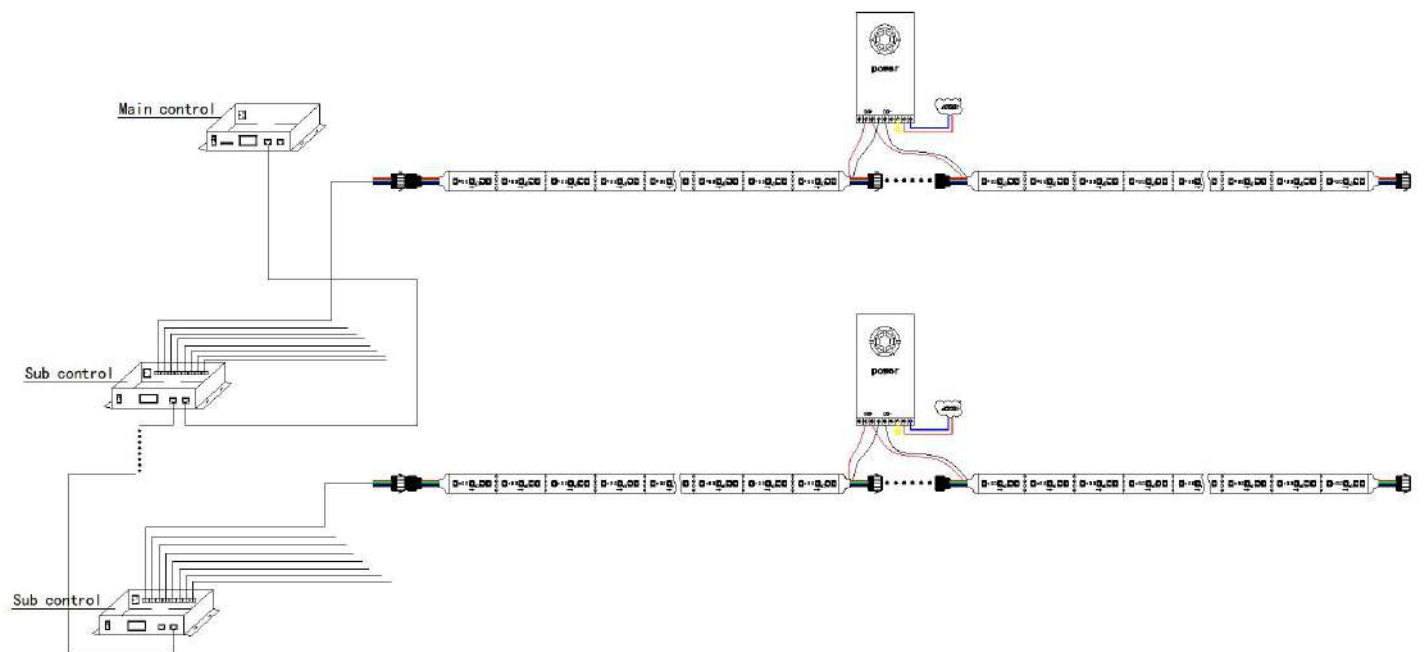

#### 4. Built-in program Auto loop playback (Small project)

Recommended controller: K1000C, K8000C

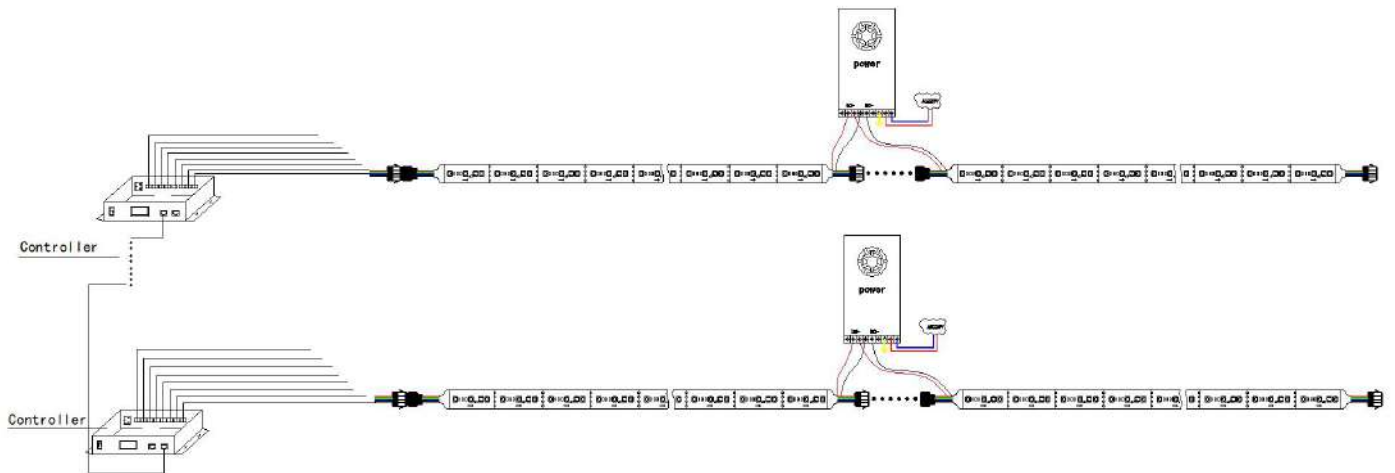

## 7. Installation Notes

- (1) Please read the manual in detail before installation.
- (2) Before installation, make sure that the working voltage of the LED strip light matches the output voltage of the switching power supply you purchased.
- (3) When installing, pay attention to the wiring label of the lamp. The red wire is connected to "positive (+)", the black wire is connected to "negative (-)", and other colors are detailed on the wiring label of the lamp. The wiring must be powered off during installation.
- (4) It is strictly forbidden to cut off the male and female head wires with electricity, so as not to burn out the lamps in the short-circuit.
- (5) LED strip light with control must comply with the male in and female out, and the direction of the signal must be connected in series when connecting the lamps.
- (6) This strip is forbidden to be disassembled without permission, if it is disassembled without permission, our company will not bear the warranty

## 8. Simple troubleshooting

- (1) When the led strip does not turn on when it is powered on: check whether the switching power supply has a working output voltage, or whether the working voltage of the switching power supply is normal.
- (2) After the switch power supply works normally, the lamp still does not light up: check whether the signal line of the lamp is connected incorrectly or whether the connection is normal, and check whether the controller works normally and whether it has been powered on.
- (3) The above work is normal, but the led strip still does not light up: check whether the SD card of the controller has been inserted, and whether there is a program in the SD card.
- (4) The led strip jumps or flickers: Check whether the negative pole of the lamp is connected in parallel with the negative pole of the switching power supply including the GND of the controller.
- (5) If the above inspection is completed, it is still out of control, please contact our sales staff to deal with it.