

LED STRIP SPECIFICATION

5050+2835 DC24V 120LED 6PIN 12MM RGB CCT LED STRIP SPECIFICATION

Product Model : 5050+2835-dc24v-120led-6pin-12mm-RGBCCT


PART 1 Product Specification



Electrical & Optical Parameters

Parameter	Value
Input Voltage	DC 24V
Current	1.04 A/m
Working Power	25 W/m
PCB Width	12 mm
Cut Length	100 mm (12 LEDs)
LED Type	SMD5050RGB+2835CCT high brightness led
LED Quantity	120 LEDs/m
LED Color	RGB+WW+CW
Beam Angle	120°
Luminance	(WW+CW)1000Lm/m
CRI (Ra)	>80
Working Temperature	-20 °C – +60 °C
Storage Temperature	-20 °C – +60 °C
Waterproof Rating	IP20/IP65/IP66/IP68
Lifespan	> 50 000 hours


PART 2 Product Dimensions

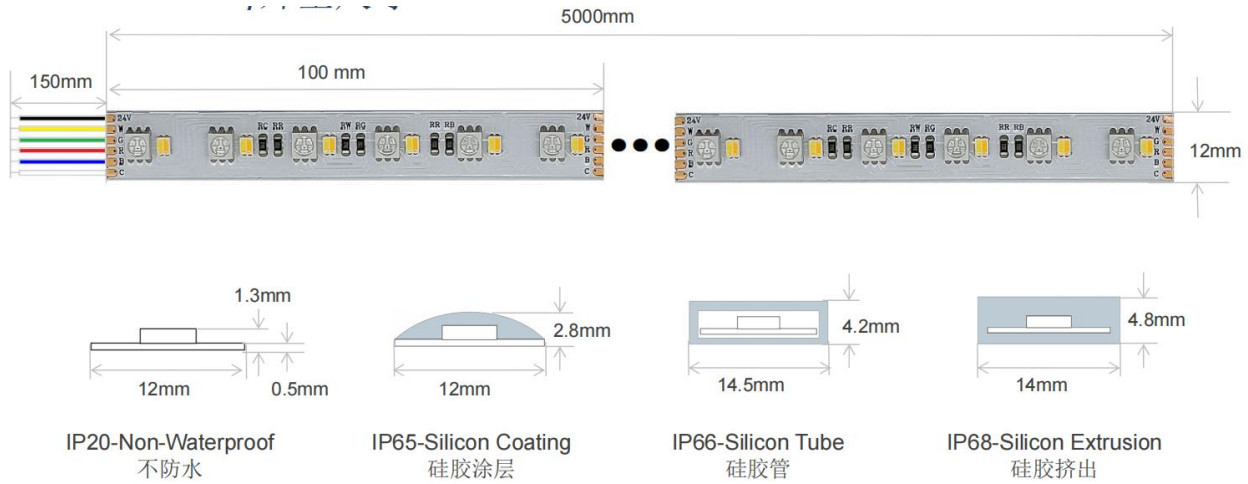

PART 3 Color Standard

Color Temperature Reference



< 2200K	2700K	3000K	4000K	6000K	> 8000K
Super Warm White	Warm White	Warm White	Natural White	White	Cold White
<i>Candlelight</i>	<i>HPS Lamp</i>	<i>Halogen / Incandescent</i>	<i>Metal Halide</i>	<i>Pure White</i>	<i>Daylight</i>

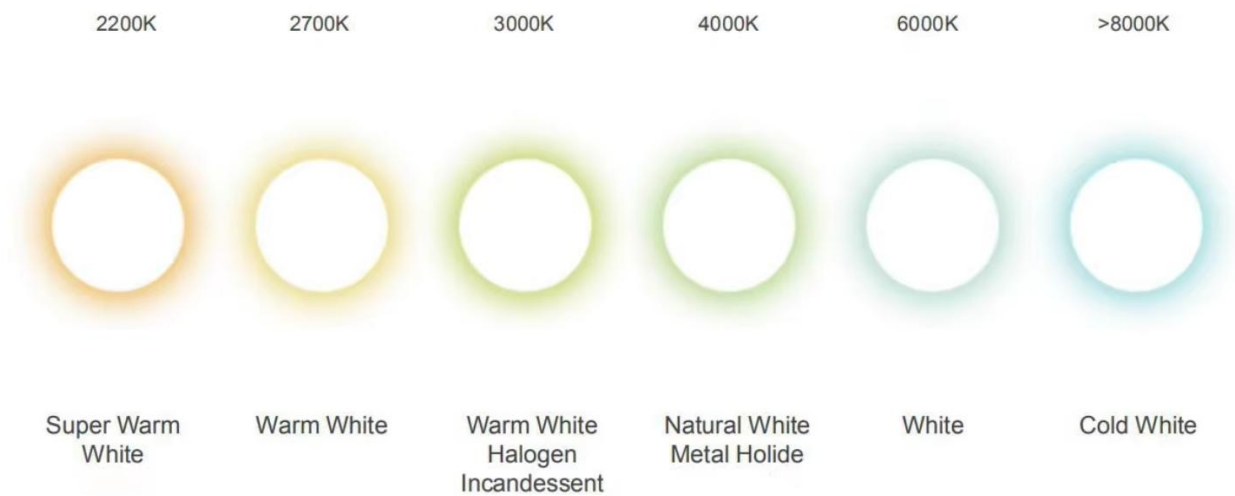

Only one Bin LED is used for each order. The same Bin is maintained in subsequent orders to ensure colour consistency across batches.

PART 4 Production Application

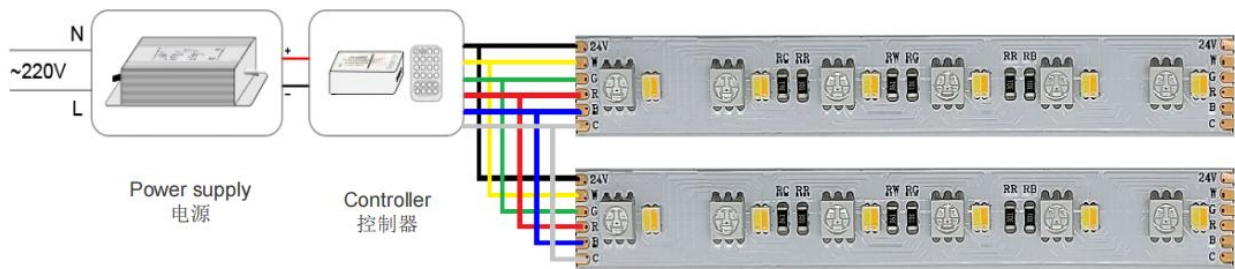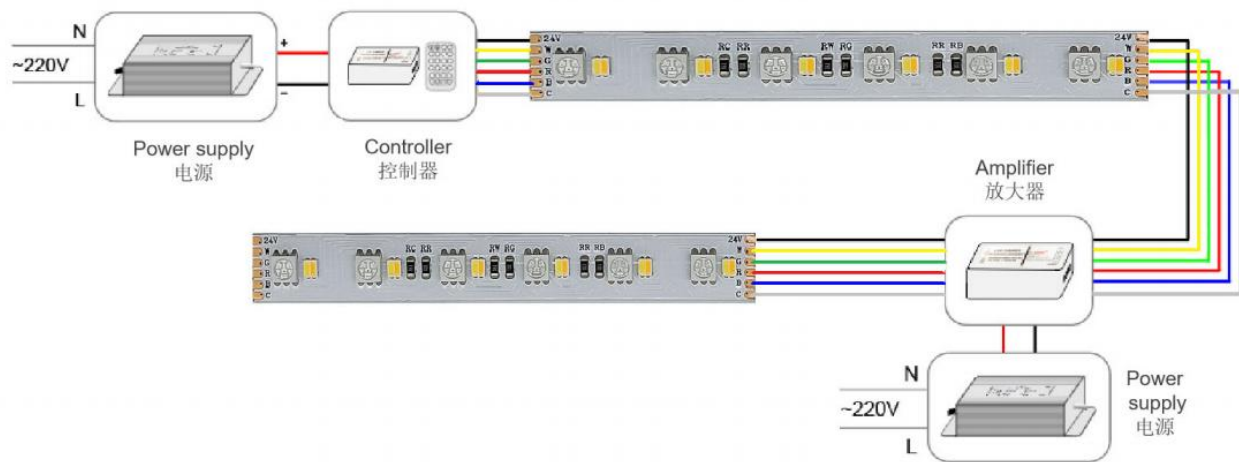


PART 5 Wiring Diagram**1. Connection method one/接线方式一****2. Connection method two/接线方式二**


PART 6 Precautions



☐ Please cut it according to the cutting line, do not cut it at other positions.

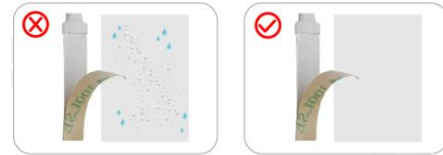

☐ Please make sure the wall is dry and free of dust before pasting.

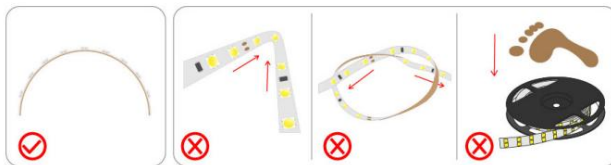

☐ Do not fold, twist or step on the led strips.



☐ The LED strip wire ends cannot be shorted together.

PART 7 Product Accessories



Power Supply




Connector



Weldless Connector



Controller



Aluminum profile

➤ Please purchase the above accessories according to your demand.

PART 8 Packaging Instructions



- Standard: 5m/roll, custom lengths supported
- No heavy stacking / stepping on cartons
- Check goods first if outer box damaged before signing